


Well Head And Wireline Equipment

Wireline Blow Out Preventor

- Types** : Manual & Hydraulic.
- Sizes** : 2½" to 3½"
- End Connection** : EUE/NU/ACME Thread Ends, Flanged Ends with API Ring Grooves.
- Pressure Ratings** : Working pressures from 5000 PSI to 15000 PSI
- Compatible with all international makes for thread Interchangeability.
 - Supplied with complete Wireline Handling Tools, Risers, Stuffing Box, Tool Trap, Gin pole, Well Head Flanges.



BOP MANUAL

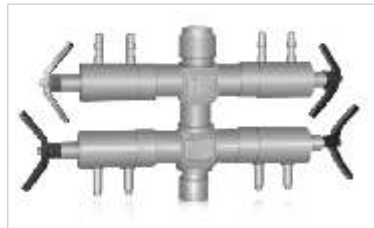

DUAL BOP HYDRAULIC



TOOL TRAP

L L L

Wireline Fishing Tools



WIRELINE SPEAR



KNUCKLE JAR



QUICK CONNECTOR

Rope Socket (For 0.92" & 0.108" Wire)
 Single Strand Rope Socket
 Knuckle Joint
 Knuckle Jar
 Wireline Stem
 Blind Box
 Tubular Jar
 Hydraulic Wireline Jar Assembly
 Roller Stem Assembly
 Tubing Swage
 Impression Block

Head Over Shot
 Overshot with Release Facility
 Wireline Spear
 Three Prong Wireline Grub
 Two Prong Wireline Grub
 Wireline Retriever
 Gauge Cutter Set
 Wire Finder
 Magnet with Skirt Guide
 Tubing End Locator
 Running Tools & Pulling Tools

L L L

❖ For more information contact us

SPARKLET ENGINEERS

17, R. K. Industry House,
Walbhat Road,
Goregaon (East),
Mumbai 400 063.

Tel.: 91-22-2685 11 59, 5699 22 59 / 60
Fax Number. : 91-22-2685 32 56
Mail us at : sparktools@mtnl.net.in, sparktools@roltanet.com
Visit us at : www.sparkletengineers.com